

ATX-6750-P

750W, Six Output Active P.F.C Function For Industrial ATX System



140 x 150 x 86 mm
5.51 x 5.9 x 3.39 inch



Features:

- * Universal AC input with active power factor correction, P.F.>0.95
- * Built in EMI filter, low ripple noise
- * Over voltage, over current, over load & short circuit protection
- * With power good signal & PS-ON signal output
- * 3.3V & 5V VRM design
- * Built-in long life ball bearing fan
- * Meet Intel ATX 2.01 / ATX2.31 / ATX 12V
- * UL, cUL, CB, CE standard
- * 3 year warranty


Specification:

INPUT	Voltage	90V ~ 264VAC universal full range or 127V ~ 375VDC.					
	Frequency	47 ----- 63 Hz					
	Current	11A max at 100V AC input, full load condition					
	Inrush Current	<40A@115V / <80A@230V AC input, full load condition. Cold start at 25℃ ambient					
	Leakage Current	<1.5mA@264V AC input					
	Power Factor	PF > 0.95					
OUTPUT	Voltage	V1	V2	V3	V4	V5	V6
		5V	3.3V	12V1	12V2	-12V	5Vsb
	Min Load	0A	0A	1A	0A	0A	0A
	Max Load	23A	23A	28A	28A	1A	3A
	Output Tolerance ②	±3%	±5%	±3%	±3%	±10%	±5%
	Ripple Noise MAX. ③	70mV	70mV	120mV	120mV	150mV	70mV
	Efficiency (tpy)	83%					
PROTECTION	Output MAX.	3.3V & 5V total output max 145W Total output max 750W					
	Over Voltage Protection	5.7V~6.5V	3.7V~4.1V	13.1V~14.5V		---	---
		Shutdown and latch off, recover after re-start up.					
	Over current (MAX)	28A	28A	33A	33A	---	---
	OverLoad & ShortCircuit	When power supply over 105%~ 150% max load or short circuit acted, power supply will be shutdown and latch off, recover after re-start up.					
ELEC. CHAR.	Rise time	<20mS					
	Hold up time	>16mS@230V					
	Power Good Signal	Power ON within 100---500ms, high level TTL signal release.					
	PS-ON Signal	P/S ON: PS-ON=Low or <0.8V ; P/S OFF: PS-ON=Hi or >2V					
ENVIRONMENT	Temperature ④	Operating: -20~70℃ ; De-rating: 45℃ ~70℃ : 2.5%/℃. ; Storage: -40~+85℃					
	Humidity	Operating: 20% ~ 90% RH(non condensing); Storage: 10% ~ 95% RH (non condensing)					
SAFETY	Withstand voltage	I/P-O/P:3KVAC, I/P-PE:1.8KVAC 1minute					
	Isolation resistance	I/P-O/P, I/P-PE, > 100MQ/500VDC at 25℃ / 70% RH					
	Safety standard	UL 62368-1, 2 nd Edition, 2014-12-01, CAN/CSA C22.2 No.62368-1-14, 2 nd Edition, 2014-12, IEC 62368-1:2014					
EMC	EMI	EN 55032 CLASS B, FCC CFR 47 PART 15 CLASS B, Compliance to EN61000-3-2 CLASS A, EN61000-3-3					
	EMS	EN 55035 : EN 61000-4-2,3,4,5,6,8,11					
OTHERS	Cooling	Forced airflow cooling with a DC fan.					
	M.T.B.F.	130K hours					
	Dimension	140 x 150 x 86 mm (L*W*H)					
	Packing	N.W.: Kg / 1pc; 6pcs / 1.95 CUFT / 1 CTN					
NOTE	① All measurements which not mentioned are based on 230VAC input, output max at ambient 25℃ / 70%RH						
	② Output tolerance included set up voltage, line regulation and load regulation. The regulation is measured at the condition : when any of output is with 20% ~ 100% max load and the rest of each outputs are with 60% max load , Each output could work within max load but must under total output max .						
	③ Ripple & noise are measured at 100~254VAC input with 0~50℃ condition and 20MHz of bandwidth by terminated with a 0.1uF & a 47uF parallel capacitor.						
	④ The operating temperature shall follow the de-rating curve in spec The output load may be requested for decreasing as de-rating curve in spec when low input voltage is under 100VAC						
	⑤ The power supply is considered a component of end-equipment. The end-equipment must be re-confirmed whether comply with EMC directives						




ATX-6750-P

De-rating Curve : E2

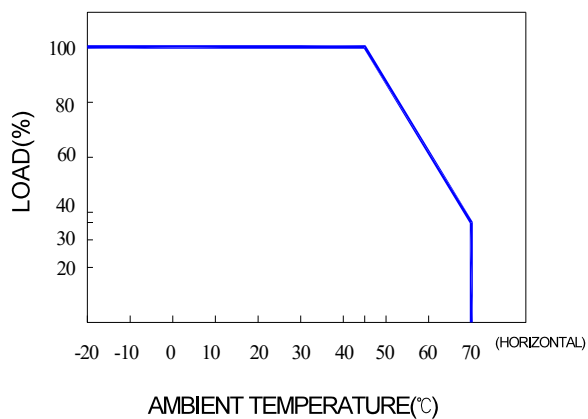

Output De-rating Vs Input Voltage :

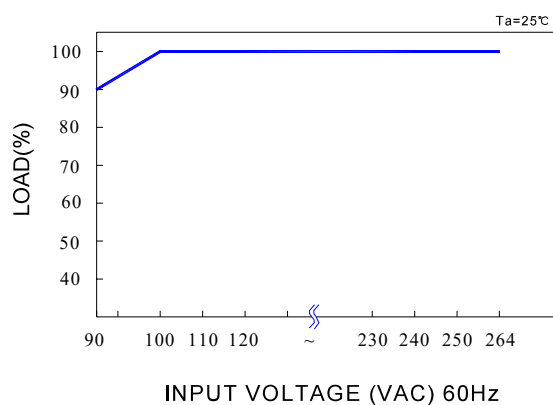

Dimension:

(Unit: mm)

